

MTC-5838HQ

MTC-5838HQ



FEATURES

3D Free Rotation




Option: Bracket



MTC-5838HQ new

- ◆ 1/3" Hi-Res. Color
- ◆ SONY HQ1
- ◆ 540TVL/ 0.25Lux@F1.2
- ◆ Built-in Varifocal Lens
- ◆ AES/AGC/BLC/F.L Switchable
- ◆ Vandal proof and IP66 Water proof level
- ◆ Unique 3 Axis Mechanism

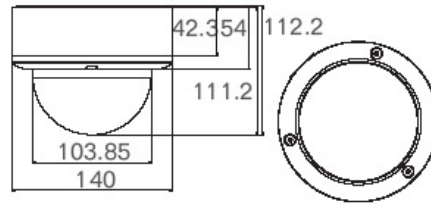

Tol:±0.5 Unit:mm

SPECIFICATIONS

	MTC-5838HQ	
TV System	PAL	NTSC
Image Sensor	1/3" SONY Super HAD CCD	
Number of Total Pixels	795(H) X 596(V)	811(H) X 508(V)
Synchronizing System	Internal	
Resolution	540 TVL	
Minimum Illumination	0.25Lux@F1.2	
Signal to Noise Ratio	More than 48dB(AGC Off)	
Automatic Gain Control	ON/OFF (Switchable)	
F.L. (Flickerless)	ON/OFF (Switchable)	
AES	ON/OFF (Switchable)	
Black Light Compensation	ON/OFF (Switchable)	
DC Level	The VR for adjusting the IRIS level of auto Iris lens.	
White Balance	AWB	
Video Output	1Vp-p Composite / 75Ω	
Lens/Angle of View (Horizontal)	Standard:f2.9mm~10mm/F1.2 Aspherical Auto Iris Lens / 94.6° ~28.8° Option:f9mm~22.0mm/F1.5 Auto Iris Lens / 29.2° ~13.0°	
Max. Breaking Strength	656.1 Kgf	
Water Resistance	IP66	
Power Supply	Standard:12Vdc ; Option: 12Vdc/24Vac	
Power Consumption	2.3W	
Operation Temperature	-10°C ~+50°C	
Operation Humidity	RH85% or less	
Storage Temperature	-20°C ~+60°C	
Dimensions	112.2(DIA) X 140(H)mm	
Weight	950 g	